




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04L 12/24		A1	(11) International Publication Number: WO 00/02350
			(43) International Publication Date: 13 January 2000 (13.01.00)
(21) International Application Number: PCT/SE99/01128 (22) International Filing Date: 22 June 1999 (22.06.99) (30) Priority Data: 09/111,072 7 July 1998 (07.07.98) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors: SEGURA, Louis; 1800 Guertin, St-Laurent, Quebec H4L 4C8 (CA). ROSENZWEIG, Benita; 2600 Thimens Boulevard #706, Saint Laurent, Quebec H4L 4C8 (CA). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Dept., S-164 80 Stockholm (SE).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: METHOD OF SHARING CAPABILITIES INFORMATION BETWEEN THE NODES OF A TELECOMMUNICATIONS NETWORK

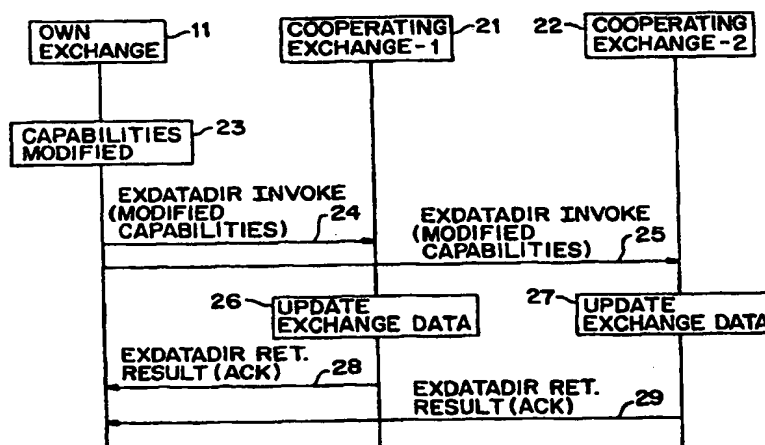

(57) Abstract

A method of sharing capabilities information between a plurality of nodes in a telecommunications network. The method begins when a new node (11) is installed in the telecommunications network or the capabilities of a node are modified. The new or modified node sends an Exchange Data Directive (EXDATADIR) Invoke message (13, 24, 25) to one or more cooperating nodes (12, 21, 22) in the network. The EXDATADIR message is an intersystem node capabilities declaration message which includes parameters relating to communications capabilities and service support capabilities of the new or modified node. If the node is a new node, this is followed by sending EXDATADIR Return Result messages (15) from each cooperating node to the new node. The EXDATADIR Return Result message is an intersystem node capabilities declaration message which includes parameters relating to services supported by the cooperating nodes. Upon receipt of a node capabilities declaration message, each node updates its exchange data with the parameters relating to the capabilities of the other nodes in the network.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**METHOD OF SHARING CAPABILITIES
INFORMATION BETWEEN THE NODES
OF A TELECOMMUNICATIONS NETWORK**

5

BACKGROUND OF THE INVENTION

Technical Field of the Invention

This invention relates to telecommunication systems and, more particularly,
10 to a method of sharing capabilities information between the nodes of a radio
telecommunications network.

Description of Related Art

In cellular telecommunications networks, each network node includes
exchange data which is utilized by the node to interface with other nodes in the
15 network. The exchange data includes data relating to the communications protocols
supported by each node in the network as well as service support capabilities. The
introduction of any new node within a cellular telecommunications networks currently
requires extensive modification to the exchange data of the existing nodes in the
network which interface with the new node. In the same manner, the exchange data
20 of the new node must also be created, and updated to include all the necessary
information regarding the existing nodes in the network with which the new node will
interface. The process of loading, updating, and verifying exchange data is not
automated, and thus is manually intensive and error prone.

Existing solutions do not permit the validation or the automatic creation of the
25 exchange data using current and valid information as provided in real-time by the
network. In addition, two-way sharing of information is not taught or suggested in the
prior art. PCT International Patent Application WO 95/30960 to Löfgren discloses an
apparatus for providing to a master device, capability information corresponding to
slave devices communicating therewith. The capability information is used by the
30 master device for communicating with the slave devices. However, information is
only sent one way (slave to master), and only information relating to the

-2-

communications capabilities of the slave devices is sent.

In order to overcome the disadvantage of existing solutions, it would be advantageous to have a method of sharing capabilities information between the nodes of a telecommunications network. The present invention provides such a method.

5

SUMMARY OF THE INVENTION

In one aspect, the present invention is a method of sharing capabilities information between a plurality of nodes in a telecommunications network. The method begins when a new node is installed in the telecommunications network and includes sending a first node capabilities declaration message from the new node to a cooperating node in the network, the first message including parameters relating to communications capabilities of the new node. This is followed by sending a second node capabilities declaration message from the cooperating node to the new node, the second node capabilities declaration message including parameters relating to services which the cooperating node is capable of supporting. The second message may also include parameters related to additional communications capabilities of the cooperating node. This is followed by updating the exchange data in each node with the parameters relating to the capabilities of the other nodes in the network.

In another aspect, the present invention is a method of sharing capabilities information between a plurality of nodes in a telecommunications network when the capabilities of a first node in the telecommunications network are modified. The method begins by sending a plurality of node capabilities declaration messages from the first node to a plurality of cooperating nodes in the network, the node capabilities declaration messages including parameters relating to communications capabilities and service support capabilities of the first node. This is followed by updating the exchange data in each of the cooperating nodes with the parameters relating to the modified capabilities of the first node. Each of the plurality of cooperating nodes then sends an acknowledgement message to the first node.

30

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the

-3-

following drawings, in conjunction with the accompanying specification, in which:

FIG. 1 is a message flow diagram illustrating the flow of messages in a cellular telecommunications network between a newly installed own exchange and an existing cooperating exchange when sharing information in a node capability declaration upon installation of the own exchange; and

FIG. 2 is a message flow diagram illustrating the flow of messages between the own exchange and a plurality of cooperating exchanges when sharing information in a node capability declaration following a capabilities update of the own exchange during operation.

DETAILED DESCRIPTION OF EMBODIMENTS

The present invention introduces new messages within an intersystem signaling protocol such as, for example ANSI-41, that simplify and automate much of the process of creating and updating exchange data in cellular network nodes. "Exchange data" includes data relating to the addresses, communications protocols, and service support capabilities of each node in the network, and may be applicable to a Mobile Switching Center (MSC), Short Message Service Message Center (MC), Home Location Register (HLR), Visitor Location Register (VLR), etc. Whenever a new node is introduced in the network, or is updated, the node declares its capabilities to the network in a process referred to as the "node capability declaration". The information that the new node declares may include, but is not limited to:

- a) Node type by subsystem number (MSC, MC, HLR, VLR, etc.);
- b) Destination address (network-cluster-member);
- c) Functionality Supported;
- d) Private Data supported/not supported;
- e) A unique identifying number for each exchange, such as a Global Cooperating Exchange Number (GLEXM);
- f) Signaling Protocol level supported (proprietary protocols, IS-41 rev.x, etc.);
- and
- g) Air Interface Supported (i.e. Protocol Version, Hyperband).

Similarly, any existing nodes with which the new node interacts send the new node information regarding the capabilities of the responding existing nodes. This

-4-

information is utilized to build up and validate the exchange data for the new node.

The invention is not limited to AMPS-type networks, but is also applicable to GSM or other core network signalling standards as well. This, in turn, simplifies production, lowers network operating costs, and reduces or eliminates manual exchange data production and maintenance. The automatic updating of cooperating exchange data tables to reflect modifications to exchange data decrease the possibility of errors in reproducing the data as well as alleviating the operator's task of entering the data manually.

10 COOPERATING EXCHANGE DATA

This section describes the node capability declaration as it applies to cooperating exchange data. In cellular systems today, own exchange data and cooperating exchange data are entered by the operator in order to define the characteristics of the exchanges for roaming and handoff purposes. The administration of cooperating and own exchange data is controlled by a series of commands for defining, modifying, deleting and printing of exchange data. Cooperating exchange data may include, but is not limited to:

- a) An end-of-selection code indicating the action taken for calls to an exchange's own roaming mobile subscriber (for example, re-routing to operator or to the visited exchange);
- b) A global cooperating exchange number used to identify the own exchange in all the signaling networks (GLEXM);
- c) A roaming type (i.e., automatic or manual);
- d) A designation indicating the exchange identity in the signaling network (EXM);
- e) A signaling protocol to be used for a specific exchange;
- f) A functionality indicator denoting the capabilities of the cooperating exchange for:
 - Private data supported/not supported
 - Busy information suppressed/not suppressed
 - Global title addressing supported/not supported
 - Pre-routing call setup supported/not supported
 - Page response messages supported/not supported
 - Redirection request supported/not supported

-5-

- Local access barring supported/not supported
 - Authentication supported/not supported
 - Information Forward message supported/not supported
 - Paging prior to acknowledge supported/not supported; and
- 5 g) A routing interrogation code used as an indication of how to treat call to HLR subscriber roaming to a cooperating exchange. For example, call barring, routing announcement.

Self-Identification Upon Installation

10 The information defining the own exchange and all cooperating exchanges forms part of the exchange data which is loaded into the own exchange when it is first put into operation. In addition, all the cooperating exchange databases are updated to reflect the introduction of the new exchange into the cellular network. In order to minimize operator intervention and reduce the possibility of errors in reproducing the cooperating exchange data, a new node identifies itself and declares its capabilities to
15 the cellular network upon installation. In turn, the cooperating exchanges automatically update their databases. Furthermore, the newly installed exchange receives the exchange data from all cooperating exchanges and populates its own cooperating exchange database accordingly.

20 At the installation of a new exchange, the minimum cooperating exchange data required to communicate with the existing exchanges in the network must be maintained within the new exchange. The minimum cooperating exchange data is the protocol to be used for each specific destination, whether a proprietary protocol or an IS41 protocol revision. This information is maintained for interoperability purposes.
25 The cooperating exchange destination parameters for the Message Transfer Part (MTP) and Signalling Connection Control Part (SCCP) are expressed as network, cluster, and member codes, and should be provided in the exchange data of the new exchange. The remaining exchange data is declared by the new exchange to the cooperating exchanges when the new exchange is brought into service. At this time,
30 the newly installed exchange also receives the remaining exchange data from the cooperating exchanges.

FIG. 1 is a message flow diagram illustrating the flow of messages in a cellular

-6-

telecommunications network between a newly installed own exchange 11 and an existing cooperating exchange 12 when sharing information in a node capability declaration upon installation of the own exchange. In this embodiment, the ANSI-41 intersystem signaling protocol is utilized to transfer the exchange information from one exchange to another, although other intersystem signaling protocols may be utilized and remain within the scope of the present invention. Upon installation, the own exchange 11 forwards a Transaction Capabilities Application Part (TCAP) Invoke message 13 to the cooperating exchange and includes parameters defining the capabilities of the own exchange. The identification portion of the TCAP message identifies the message as an Exchange Data Directive (EXDATADIR) Invoke message. In response, the cooperating exchange updates its exchange data at 14 and returns a EXDATADIR Return Result message 15 acknowledging the declaration of capabilities, and providing the capabilities of the cooperating exchange to the own exchange. The capabilities reported may include services supported by the cooperating exchange and additional communications capabilities. The own exchange then updates its exchange data at 16.

Self-Identification During Operation

Following installation, there are times when there is a need to update the cooperating exchange data as a result of modifications in the capabilities of one or more network nodes. Revisions to the own exchange data must be reflected in all cooperating exchange databases and is, currently, entered manually by the operator. In the first embodiment of the present invention, this is accomplished automatically by sending a EXDATADIR Invoke message defining the modified node capability parameters from the own exchange to the existing cooperating exchanges whenever an update is introduced by the operator in the own exchange. In turn, the cooperating exchanges revise their databases accordingly and acknowledge the receipt of the information with an EXDATADIR return result message to the originating own exchange.

FIG. 2 is a message flow diagram illustrating the flow of messages between the own exchange 11 and a plurality of cooperating exchanges 21 and 22 when sharing information in a node capability declaration following a capabilities update of the own

-7-

exchange during operation. At 23, the system operator changes the capabilities of the own exchange. The own exchange automatically sends an EXDATADIR Invoke message 24 to the first cooperating exchange (Cooperating Exchange-1) 21 and includes the modified node capabilities in the message parameters. The own exchange also sends an EXDATADIR Invoke message 25 to the second cooperating exchange (Cooperating Exchange-2) 22 and includes the modified node capabilities in the message parameters. At 26, Cooperating Exchange-1 updates its exchange data, and at 27, Cooperating Exchange-2 updates its exchange data with the new capabilities information. Cooperating Exchange-1 then sends an EXDATADIR return result message 28 to the own exchange with an acknowledgement of the modified capabilities. Cooperating Exchange-2 also sends an EXDATADIR return result message 29 to the own exchange with an acknowledgement of the modified capabilities.

15 Closed-Loop Mode of Operation

In the closed-loop mode of operation, the node capability declaration function sets the cooperating exchange data by updating the exchange database automatically in accordance with pre-defined constraints. In this mode, a validation check of the data may be performed prior to inserting the data in the cooperating exchange database. For example, if a parameter is present which indicates that the cooperating exchange is capable of sending and receiving Information Forward messages, this parameter can be verified against the indicated signaling protocol version supported by the cooperating exchange. The Information Forward message is only available in network nodes supporting IS41 revision C and up. In addition, the GLEXM and EXM designations must be unique and this, too, can be verified.

Interoperability

Some existing nodes within the network may not recognize the new parameters of the EXDATADIR Invoke message which define node capabilities. These existing nodes must continue to have their cooperating exchange data tables updated manually by the operator. For interoperability purposes, the network nodes complying with the forward compatibility requirements of ANSI-41D (formerly Technical Service

-8-

Bulletin 55 (TSB 55)) send an EXDATADIR Reject Response message upon receipt of an unknown message. Also, additional unknown parameters or additional parameters with unrecognized values received by an end network node are discarded in accordance with the ANSI-41 forward compatibility requirements. Intermediate
5 network nodes forward the additional parameters transparently through the network to the end node.

As noted above, parameters indicating the address of each cooperating exchange and the signaling protocol to be used for each cooperating exchange are defined in the exchange data as part of the cooperating exchange database. Therefore,
10 the newly installed own exchange is aware of the correct intersystem signaling protocol used for communication with each of the existing cooperating exchanges. Also, during operation, an indication of the signaling protocol is maintained within the cooperating exchange database. Thus, the ANSI-41 node capability declaration (EXDATADIR) message is only sent to cooperating exchanges which implement the
15 ANSI-41 protocol versions capable of recognizing the message and utilizing the capabilities parameters.

It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method shown and described has been characterized as being preferred, it will be readily apparent that
20 various changes and modifications could be made therein without departing from the spirit and scope of the invention as defined in the following claims.

WHAT IS CLAIMED IS:

1. A method of sharing capabilities information between a plurality of nodes in a telecommunications network comprising:
5 installing a new node in the telecommunications network;
sending a first node capabilities declaration message from the new node to a cooperating node in the network, said first message including parameters relating to communications capabilities of the new node; and
10 sending a second node capabilities declaration message from the cooperating node to the new node, said second message including parameters related to services which the cooperating node is capable of supporting.
2. The method of sharing capabilities information of claim 1 wherein the step of sending a first node capabilities declaration message includes sending a first
15 node capabilities declaration message which also contains parameters related to services which the new node is capable of supporting.
3. The method of sharing capabilities information of claim 2 wherein the step of sending a second node capabilities declaration message includes sending a
20 second node capabilities declaration message which also contains parameters related to communications capabilities of the cooperating node.
4. The method of sharing capabilities information of claim 2 wherein the step of sending a first node capabilities declaration message includes sending an
25 Exchange Data Directive (EXDATADIR) Invoke message which includes parameters relating to communications capabilities of the new node and parameters related to services which the new node is capable of supporting.
5. The method of sharing capabilities information of claim 2 wherein the
30 step of sending a second node capabilities declaration message includes sending an Exchange Data Directive (EXDATADIR) Return Result message which includes parameters related to services which the cooperating node is capable of supporting.

-10-

6. The method of sharing capabilities information of claim 2 further comprising, after the step of sending a first node capabilities declaration message, the step of updating exchange data in the cooperating node with the parameters relating to communications capabilities of the new node and parameters related to services
5 which the new node is capable of supporting.

7. The method of sharing capabilities information of claim 6 further comprising, after the step of sending a second node capabilities declaration message, the step of updating exchange data in the new node with the parameters related to
10 services which the cooperating node is capable of supporting.

8. A method of sharing capabilities information between a plurality of nodes in a telecommunications network comprising:
modifying the capabilities of a first node in the telecommunications network;
15 sending a plurality of node capabilities declaration messages from the first node to a plurality of cooperating nodes in the network, said node capabilities declaration messages including parameters relating to communications capabilities of the first node; and
sending an acknowledgement message from each of the plurality of
20 cooperating nodes to the first node.

9. The method of sharing capabilities information of claim 8 wherein the step of sending a plurality of node capabilities declaration messages includes sending node capabilities declaration messages which also contain parameters related to
25 services which the new node is capable of supporting.

10. The method of sharing capabilities information of claim 9 further comprising, after the step of sending a plurality of node capabilities declaration messages, the step of updating exchange data in each of the plurality of cooperating
30 nodes with the parameters relating to the modified capabilities of the first node.

1 / 1

FIG. 1


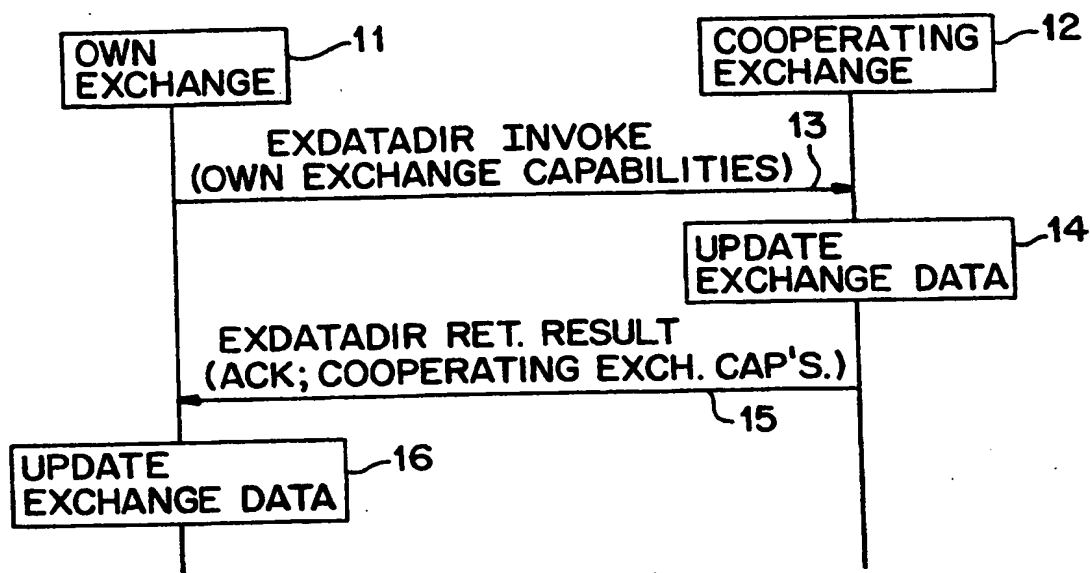


FIG. 2

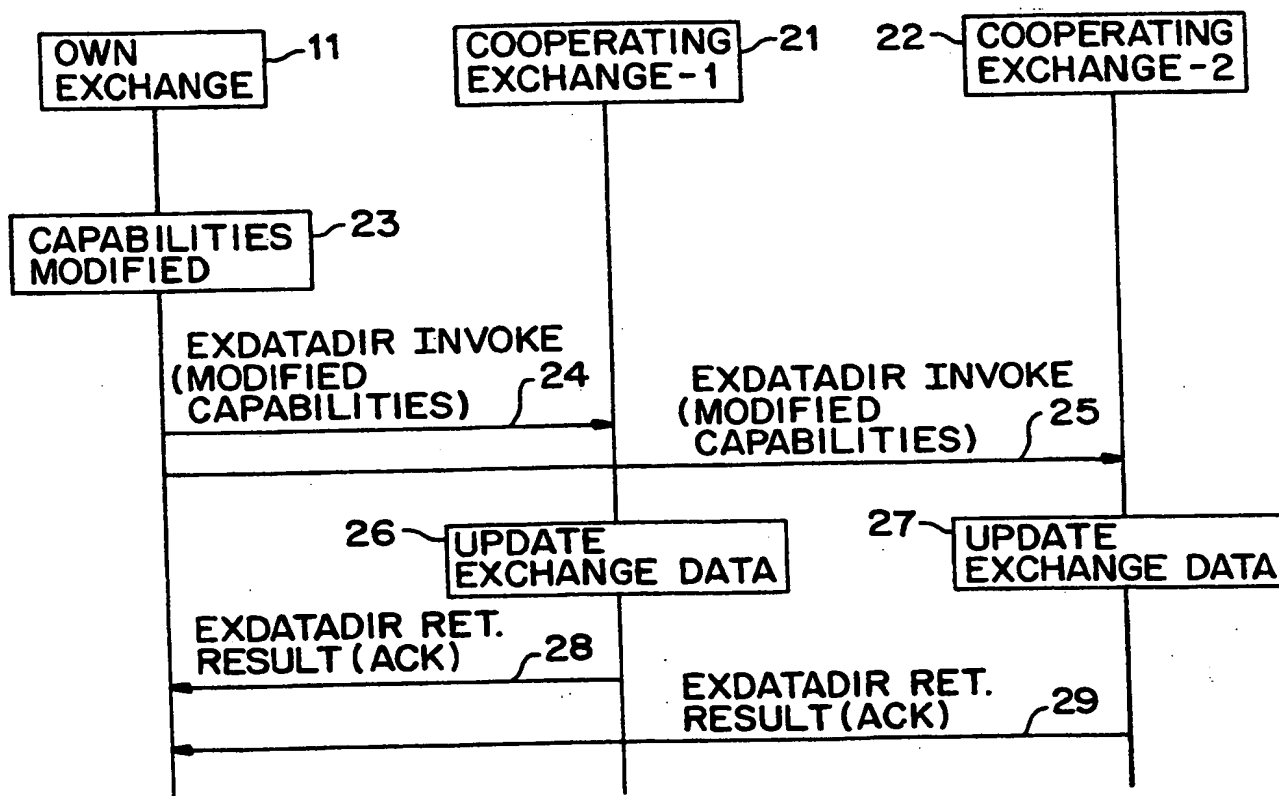

INTERNATIONAL SEARCH REPORT

International Application No
PCT/SE 99/01128

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 386 512 A (CRISMAN ET AL.) 31 January 1995 (1995-01-31) abstract column 4, line 39 - line 64 column 6, line 31 - line 36 column 12, line 14 - line 36 ---	1,8
A	WO 98 26625 A (TELFONAKTIEBOLAGET LM ERICSSON) 18 June 1998 (1998-06-18) abstract page 2, line 25 -page 3, line 7 page 6, line 12 - line 26 page 8, line 16 - line 27 --- -/--	1-10

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

28 October 1999

Date of mailing of the international search report

05/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Larcinese, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/01128

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>GB 2 318 030 A (IBM CORPORATION) 8 April 1998 (1998-04-08) abstract page 3, line 31 -page 4, line 2 page 5, line 1 - line 18 -----</p>	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/01128

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
---	---------------------	----------------------------	---------------------

US 5386512	A	31-01-1995	NONE
WO 9826625	A	18-06-1998	AU 7852298 A 03-07-1998
GB 2318030	A	08-04-1998	NONE

WOLF, GREENFIELD & SACKS, P.C.
Attn. Henry, Steven J.
600 Atlantic Avenue
Boston, Massachusetts 02210
UNITED STATES OF AMERICA

Date: 05/04/2002

THIS PAGE BLANK (USPTO)